

Your Complete Wood Stove Venting Solution

MODEL CF
Sentinel
WOOD STOVE CHIMNEY



INSTALLATION PLANNING GUIDE



Getting Started


Before you begin, determine the (inner) diameter of your Chimney.



This is usually the same size (6", 7" or 8") as the flue collar on your wood stove.

Helpful Installation Tips

Need Help? ... Contact us at: 1-888-SELKIRK (735-5475)
or, visit us online @ www.selkirkcanada.com

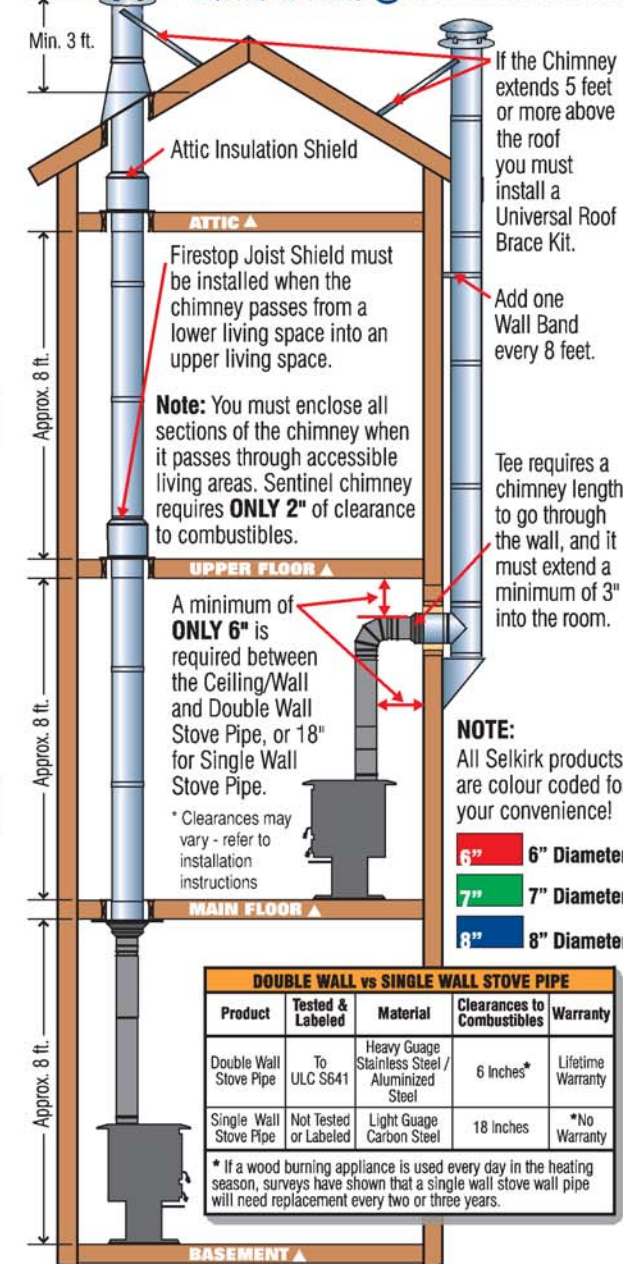

Selkirk Canada Corporation
1400 California Ave., Brockville, On K6V 5V3
P: 1-800-267-8178 F: 1-800-663-3620 E: info@selkirkcanada.com

100CF-E R&B [3396-02/06]


STEP 2 - Determine the number of Chimney Lengths Required

This chart will help determine chimney lengths required.

| CHIMNEY LENGTH SELECTION CHART | | | | | | | | | | | |
|--------------------------------|------------------|-----|---|----------------|------------------|-----|---|----------------|------------------|-----|---|
| Chimney Height | Lengths Required | | | Chimney Height | Lengths Required | | | Chimney Height | Lengths Required | | |
| 36" | 18" | 12" | | 36" | 18" | 12" | | 36" | 18" | 12" | |
| 4' | 1 | 1 | - | 12 1/2' | 4 | - | 1 | 20' | 7 | - | - |
| 5' | 1 | 1 | 1 | 13' | 4 | 1 | - | 21' | 7 | - | 1 |
| 5 1/2' | 2 | - | - | 14' | 4 | 1 | 1 | 22' | 7 | 1 | - |
| 6 1/2' | 2 | - | 1 | 14 1/2' | 5 | - | - | 22 1/2' | 7 | 1 | 1 |
| 7' | 2 | 1 | - | 15 1/2' | 5 | - | 1 | 23' | 8 | - | - |
| 8' | 2 | 1 | 1 | 16' | 5 | 1 | - | 24' | 8 | - | 1 |
| 8 1/2' | 3 | - | - | 17' | 5 | 1 | 1 | 24 1/2' | 8 | 1 | - |
| 9 1/2' | 3 | - | 1 | 17 1/2' | 6 | - | - | 25 1/2' | 8 | 1 | 1 |
| 10' | 3 | 1 | - | 18' | 6 | - | 1 | 26' | 9 | - | - |
| 11' | 3 | 1 | 1 | 19' | 6 | 1 | - | 27' | 9 | - | 1 |
| 11 1/2' | 4 | - | - | 19 1/2' | 6 | 1 | 1 | | | | |

The chimney must extend at least 3' above the highest point where it passes through the roof surface and at least 2' higher than any part of the building within a horizontal distance of 10'.

NOTE: When calculating the installed length of your chimney subtract 1" for each joint & include the Height Requirements shown in this illustration.

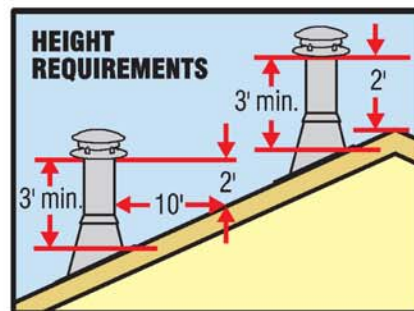


STEP 3 - Verify the proper Roof Flashing required for your installation

To determine which Roof Flashing you require, work out the pitch of your roof.

Roofs with low inclines require a 0/12 - 6/12 Roof Flashing:

Roofs with steep inclines require a 7/12 - 12/12 Roof Flashing:

To calculate your roof pitch use one of the 12 inch rulers to measure the number of inches (A) from the end of the other ruler down to the roof. (as shown in this illustration)
For example:
If (A) equals 3" then the roof pitch is 3/12.

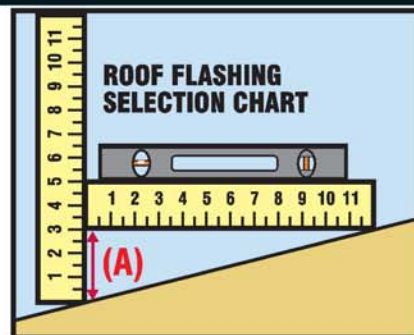


STEP 4 - For Ceiling Support Installations Only

If an offset is required to avoid rafters or other obstructions.

Measure the horizontal distance required and the vertical height available.

Refer to the Chimney Offset Chart.

NOTE: Never offset an exterior chimney**

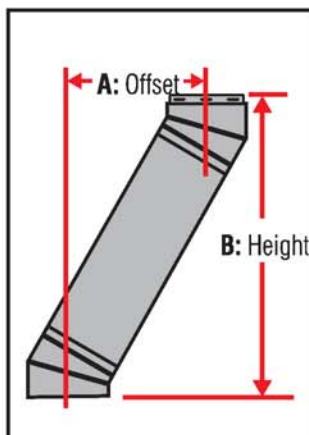

** Refer to installation instructions for addition information on offsets

| 150° OFFSET CHART | | | | | | | |
|-------------------|--------------------|-------------|---------|-------------|----------|-------------|----------|
| Elbow | Chimney Lengths | 6" Diameter | | 7" Diameter | | 8" Diameter | |
| | | A | B | A | B | A | B |
| 2 x 150° | 9" chimney length | 3-3/4" | 18-1/2" | 3-5/8" | 18-7/8" | 3-5/8" | 19-1/4" |
| 2 x 150° | 12" chimney length | 4-1/2" | 20-3/8" | 4-1/8" | 20-3/4" | 4-1/8" | 20-7/8" |
| 2 x 150° | 18" chimney length | 5-5/8" | 26-1/8" | 5-3/4" | 26-1/2" | 5-3/4" | 26-3/4" |
| 2 x 150° | 36" chimney length | 10-3/8" | 43-7/8" | 10-1/2" | 44-1/8" | 10-1/2" | 44-1/2" |
| 300° OFFSET CHART | | | | | | | |
| Elbow | Chimney Lengths | 6" Diameter | | 7" Diameter | | 8" Diameter | |
| | | A | B | A | B | A | B |
| 2 x 300° | 9" chimney length | 7-3/4" | 20" | 8" | 20-1/2" | 8-1/8" | 21-3/16" |
| 2 x 300° | 12" chimney length | 8-5/8" | 21-1/2" | 8-7/8" | 22-1/4" | 9" | 22-3/4" |
| 2 x 300° | 18" chimney length | 11-3/4" | 26-3/4" | 11-7/8" | 27-3/8" | 12" | 28" |
| 2 x 300° | 36" chimney length | 20-7/8" | 42-5/8" | 21" | 43-3/16" | 21-1/4" | 43-7/8" |

STEP 5 - Determine the Double Wall Stove Pipe parts needed to complete your installation

Made in Canada Fabriqué au Canada


STEP 1 - Select the type of installation by determining where your chimney will run.

Installations may vary, please refer to the installation instructions @ www.selkirkcanada.com

Installation Planning Work Sheet

Diameter Required: 6" 7"

Ceiling Support Installation A

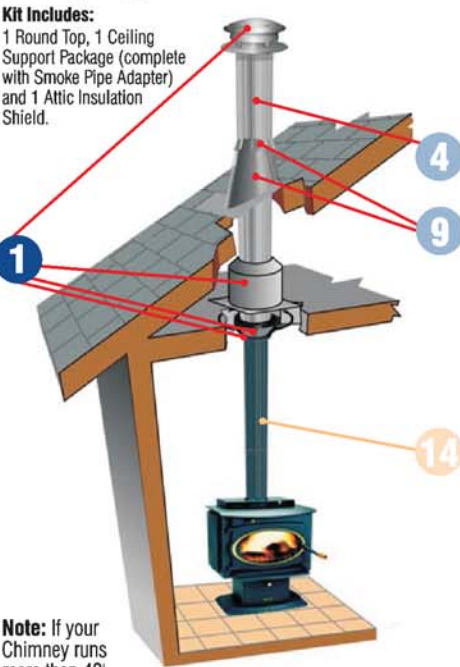


Kit Includes:
1 Round Top, 1 Ceiling Support Package (complete with Smoke Pipe Adapter) and 1 Attic Insulation Shield.

Note: If your Chimney runs more than 40' you must install a Roof Support.

Parts identified by 1 are Included in Ceiling Support Kit

Ceiling Support Installation B Two Storey

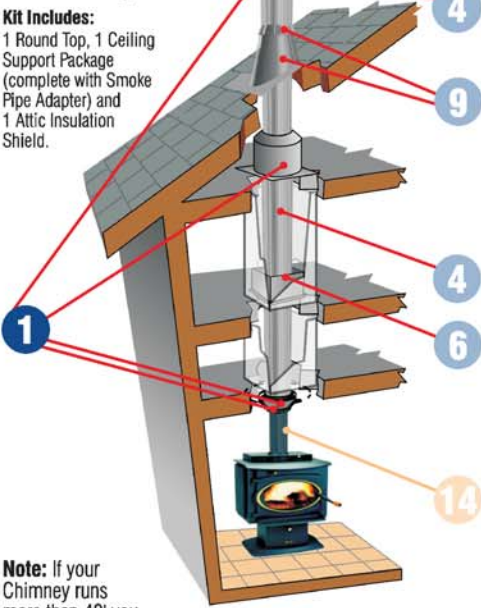


Kit Includes:
1 Round Top, 1 Ceiling Support Package (complete with Smoke Pipe Adapter) and 1 Attic Insulation Shield.

Note: If your Chimney runs more than 40' you must install a Roof Support.

Parts identified by 1 are Included in Ceiling Support Kit

Ceiling Support Installation C with Offset

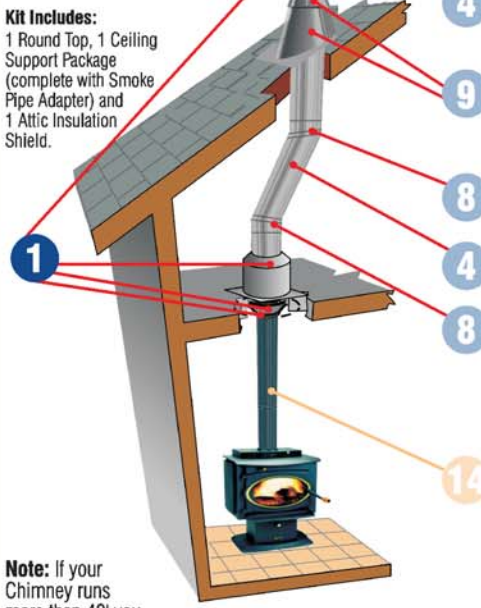


Kit Includes:
1 Round Top, 1 Ceiling Support Package (complete with Smoke Pipe Adapter) and 1 Attic Insulation Shield.

Note: If your Chimney runs more than 40' you must install a Roof Support.

Parts identified by 1 are Included in Ceiling Support Kit

Cathedral Ceiling Support Installation

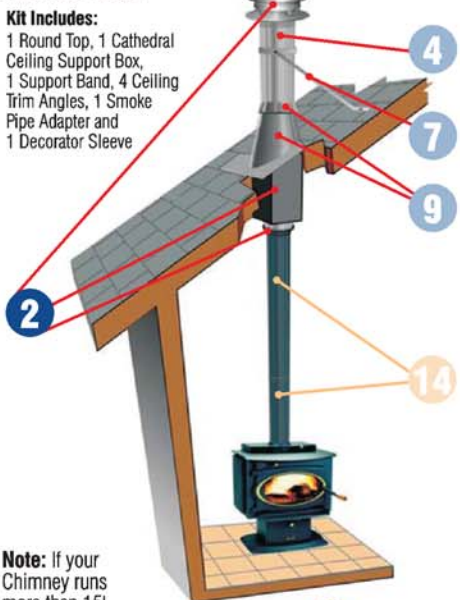


Kit Includes:
1 Round Top, 1 Cathedral Ceiling Support Box, 1 Support Band, 4 Ceiling Trim Angles, 1 Smoke Pipe Adapter and 1 Decorator Sleeve

Note: If your Chimney runs more than 15' you must install a Roof Support.

Parts identified by 2 are Included in Cathedral Ceiling Support Kit

Wall Support Installation A

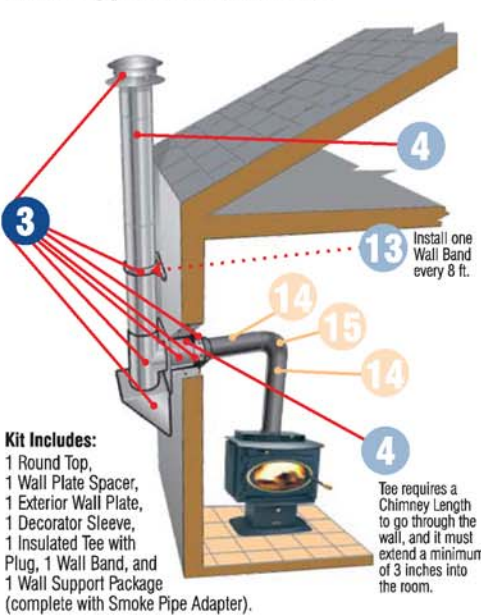


Kit Includes:
1 Round Top, 1 Wall Plate Spacer, 1 Exterior Wall Plate, 1 Decorator Sleeve, 1 Insulated Tee with Plug, 1 Wall Band, and 1 Wall Support Package (complete with Smoke Pipe Adapter).

Note: Tee requires a Chimney Length to go through the wall, and it must extend a minimum of 3 inches into the room.

Parts identified by 3 are Included in Wall Support Kit

Wall Support Installation B Through a Soffit

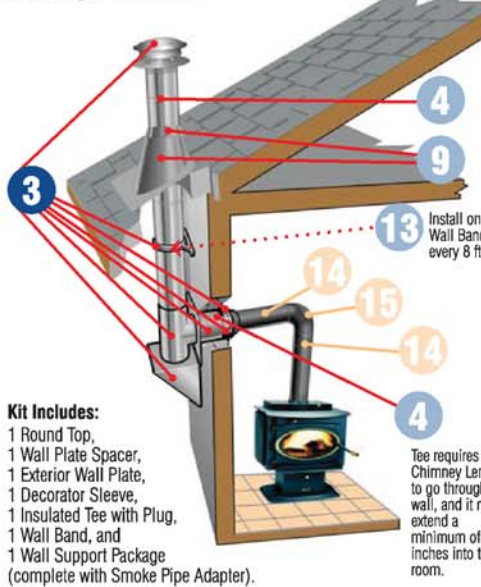

Kit Includes:
1 Round Top, 1 Wall Plate Spacer, 1 Exterior Wall Plate, 1 Decorator Sleeve, 1 Insulated Tee with Plug, 1 Wall Band, and 1 Wall Support Package (complete with Smoke Pipe Adapter).

Note: Tee requires a Chimney Length to go through the soffit, and it must extend a minimum of 3 inches into the room.

Parts identified by 3 are Included in Wall Support Kit

Note: If your Chimney runs more than 40' you must install a Roof Support.

NOTE: Asterisk "*" shown in Part #'s represents diameter required

| MODEL CF SENTINEL WOOD STOVE CHIMNEY PARTS | | Part # | Price | QTY | TOTAL |
|--|--|-------------------------|-----------|-----|-------|
| 1 | Ceiling Support Kit | *CF-CSK | \$ | X | = |
| 2 | Cathedral Ceiling Support Kit | *CF-CCSK | \$ | X | = |
| 3 | Wall Support Kit | *CF-WSK | \$ | X | = |
| 4 | Chimney Lengths (See Step 2) | 36" Length | *CF-36 | \$ | X = |
| | | 24" Length | *CF-24 | \$ | X = |
| | | 18" Length | *CF-18 | \$ | X = |
| | | 12" Length | *CF-12 | \$ | X = |
| | | 9" Length | *CF-9 | \$ | X = |
| 6 | Firestop Joist Shield (see Ceiling Support Installation B) | *CF-JS | \$ | X | = |
| 7 | Universal Roof Brace Kit (If Chimney extends 5' or more above Roof Line) (see Cathedral Ceiling Support Installation) | URBK | \$ | X | = |
| 8 | Elbow Kit (See Step 4) If Offset is Required add one of these Elbow Kits (See Ceiling Support Installation C) | 150 Kit (2 elbows/kit) | *CF-EL15K | \$ | X = |
| | | 300 Kit (2 elbows/kit) | *CF-EL30K | \$ | X = |
| | | | | | |
| 9 | Roof Flashing with Storm Collar (See Step 3) | Adjustable 0/12 - 6/12 | *CF-FRA-A | \$ | X = |
| | | Adjustable 7/12 - 12/12 | *CF-FRA-P | \$ | X = |
| | | | | | |
| Not Illustrated | Roof Support (Required if Chimney runs more than 40 ft.) | URSP | \$ | X | = |
| Not Illustrated | Spark Arrestor (Add to Round Top to prevent sparks from falling on roof. Also keeps birds & small animals from entering Chimney) | *CF-SA | \$ | X | = |
| 13 | Wall Band (See Wall Support Installations) | *CF-WB | \$ | X | = |

DOUBLE WALL STOVE PIPE PARTS

| Pipe Lengths | E-VENT #'s | DSP #'s | | | |
|-------------------|----------------------------|-----------|----------|----|-----|
| 36" Fixed Length | EV*36 | DSP*P36-1 | \$ | X | = |
| 24" Fixed Length | EV*24 | DSP*P24-1 | \$ | X | = |
| 12" Fixed Length | EV*12 | DSP*P12-1 | \$ | X | = |
| 6" Fixed Length | EV*06 | DSP*P6-1 | \$ | X | = |
| Telescopic Length | EV*70 | DSP*TL | \$ | X | = |
| Adjustable Length | EV*-*ADJ | DSP*AL-1 | \$ | X | = |
| Not Illustrated | 450 Elbow | EV*45 | DSP*E4-1 | \$ | X = |
| Not Illustrated | 900 Elbow | EV*90 | DSP*E9-1 | \$ | X = |
| Not Illustrated | Tee (includes Cap) | EV*T | DSP*TE-1 | \$ | X = |
| Not Illustrated | Masonry Adapter | EV*MC | DSP*MA | \$ | X = |
| Not Illustrated | Stove Adapter | EV*SA | DSP*SA-1 | \$ | X = |
| Not Illustrated | Damper Kit | N/A | DSP*DK-1 | \$ | X = |
| Not Illustrated | Finishing Band (Universal) | EV-FB | DSP-FB | \$ | X = |
| Not Illustrated | Insulated Wall Thimble | SC*IT | DSP*IWT | \$ | X = |

8" SKU's may vary - see dealer for details.

TOTAL \$